

UTILITY PATENT APPLICATION  
UNDER 37 CFR 1.53(b)

Assistant Commissioner for Patents  
Washington D.C. 20231

Case Docket No. 4425-066

Sir:

Transmitted herewith for filing is the patent application of:

INVENTOR: Wen-Yuan CHANG

FOR: APPARATUS COMPENSATING A SCANNED OBJECT FOR OPTICAL  
CHARACTERISTICS ACCORDING TO LIGHT SOURCES OF DIFFERENT  
WAVELENGTHS

Enclosed are:

- ☒ 14 pages of specification, claims, abstract
- ☒ Declaration & Power of Attorney
- ☐ Priority Claimed
- ☐ Certified copy of
- ☒ An assignment of the invention to UMAX DATA SYSTEMS INC. and the assignmen  
recording fee
- ☒ Return Receipt Postcard
- ☐ Information Disclosure Statement, Form PTO-1449
- ☐ Copies of IDS Citations
- ☒ Credit Card Payment Form


The filing fee has been calculated as shown below:

	NO. FILED		NO. EXTRA	RATE	AMOUNT
Total Claims	17	MINUS 20	0	X \$18 =	\$ 0.00
Independent Claims	3	MINUS 3	0	x \$78 =	\$ 0.00
If multiple dependent claims are presented, add \$260.00					\$0.00
Basic Fee					\$ 690.00
Total of above calculations					\$ 0.00
<input checked="" type="checkbox"/> Assignment and Recording Fee					\$40.00
TOTAL FEE					\$ 730.00

- [ X ] Please charge the amount of \$730.00 to American Express 3728 327418 95003
- [ ] Please charge my Deposit Account No. 07-1337 in the amount of \$.00. A duplicate copy of this sheet is enclosed.
- [ X ] The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 07-1337. A duplicate copy is enclosed.
- [ X ] Any additional filing fees required under 37 CFR 1.16.
- [ X ] The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 07-1337. A duplicate copy of this sheet is enclosed.
- [ X ] If an insufficient payment is submitted herewith for a required fee, charge Deposit Account No. 07-1337 for patent application processing fees under 37 CFR 1.17.
- [ X ] Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

LOWE HAUPTMAN GOPSTEIN GILMAN & BERNER, LLP

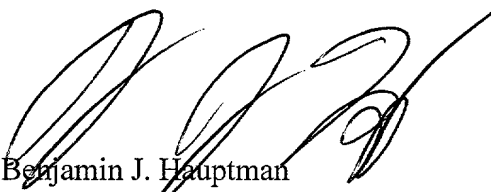  
Benjamin J. Hauptman  
Registration No. 29,310

1700 Diagonal Road, Suite 310  
Alexandria, Virginia 22314  
(703) 684-1111  
(703) 518-5499 Facsimile  
Date: September 19, 2000  
BJH/rl

# **APPARATUS COMPENSATING A SCANNED OBJECT FOR OPTICAL CHARACTERISTICS ACCORDING TO LIGHT SOURCES OF DIFFERENT WAVELENGTHS**

5

## **BACKGROUND OF THE INVENTION**

### **1. Field of the Invention**

10       The present invention generally relates to an apparatus for scanning objects of various types, and more particularly to a scanner which can compensate for optical characteristics according to using different wavelength light sources.

### **15   2. Description of the Prior Art**

Optical scanning apparatuses are currently in great demand as a result of the rapid development of high speed, low cost imaging devices and the ever decreasing cost of personal computers. Optical scanners, in  
20   general, are capable of reflective and/or transmissive scanning of documents, photographs and the like, whereby reflective scanning is used with opaque objects such as photographs and transmissive scanning is used with transparent objects, such as slides and the like. Reflective scanners project light onto the side of the object to be scanned.  
25   The reflected light is viewed by an optical sensor which converts the reflected light into digital code. The code is then transmitted to the

operator's computer for further processing. Transmissive scanners operate on the same principle except that light is projected through the transparent object being scanned. A great demand exists for high quality, low cost, low maintenance, easy to calibrate, versatile optical scanners capable of both high and low resolution reflective and transmissive scanning.

As shown on FIG. 1, a conventional scanner typically comprises a control module 110, a light source 111, a power module 112, a image capture module 113, a loading platform module 114, and a translation module 115. The control module 110 comprises a host unit for image processing and a plurality of control circuits for scanning process. The light source 111 is for use while an object is scanned. The power module 112 comprises power units for supporting scanning process. The image capture module 113 comprises a plurality of lenses and optical sensors. The lenses are for performing optical pathways and the optical sensors, such as charge-coupled devices, are for sensing lights from the lenses and convert light signals into electric signals. A translation module is for translating the light source 111 and the image capture module in a main-scanning direction when the object is scanned.

Generally, there are many different types for scanned objects, such as paper document, transparent slide, and so on. A high-quality output image depends on the imaging system of a scanner for different types of objects. However, there are many factors related to the good imaging system, such as wavelength of light source, optical

characteristics of optical devices and optical pathway, and so on. That is, the high-quality output images can't be satisfied for objects of various types if there is only one imaging system in a scanner.

5

## **SUMMARY OF THE INVENTION**

Accordingly, it is an object of the present invention to provide an apparatus of scanning which has different light sources to fit the scanned objects of various types.

It is further object of the invention to provide a scanner which can adjust the location of a lens and a sensors array of the scanner according to using the light sources of different wavelengths.

15

It is another object of the invention to provide a scanner which can compensate for the optical characteristics of different light sources to improve the qualities of an output image.

In the present invention, an apparatus for scanning images comprises an image capture module having at least a lens and a sensors array for capturing light after scanning the object. A plurality of light sources comprise a visible light source and an infrared light source. Next, a key module of the present invention is a first translation module connected with the lens and the sensors array of the image capture module. To be specific, the first translation module is used for changing a first location of the lens and a second location of the sensors

25

array according to using different the light sources so as to improve some optical characteristics, such as aberration resulting from different wavelengths of light sources. A power module connects with the first translation module and the light sources for supporting energy to the first translation module and the light sources. Moreover, a second translation module connects with the light sources and the image capture module, and the second translation driven by the power module. A control module connects to the power module and the image capture module, and a loading platform module has a platform and therein all the modules and the light sources are placed.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

The foregoing aspects and many of the attendant advantages of this invention will become more readily appreciated as the same becomes better understood by reference to the following detailed description, when taken in conjunction with the accompanying drawings, wherein:

FIG. 1 is a system diagram for a conventional scanning apparatus;

FIG. 2 is a system diagram for a scanning apparatus of the present invention;

FIGS. 3A-3B are the schematic diagrams of devices in one preferred embodiment of the present invention; and

FIGS. 4A-4B are the schematic diagrams of devices in other one preferred embodiment of the present invention.

5

### DESCRIPTION OF THE PREFERRED EMBODIMENT

There is shown a representative portion of a scanner structure of the present invention in enlarged, cross-sections of two dimensional views for a scanner. The drawings are not necessarily to scale, as the size of the various devices are shown for clarify of illustration and should not be interpreted in a limiting sense. Accordingly, these regions will have dimensions, including length, width and depth, when fabricated in an actual device.

15

In the present invention, an scanner for scanning an object comprises an image capture module having at least a lens and a sensors array for capturing light after scanning the object. A plurality of light sources comprise a visible light source and an infrared light source. Next, a key module of the present invention is a first translation module connected with the lens and the sensors array. To be specific, the first translation module is used for changing a first location of the lens and a second location of the sensors array according to using different the light sources so as to improve some optical characteristics, such as aberration resulting from different wavelengths of light sources. A power module connects with the first translation module and the light sources for supporting energy to the first translation module and the

20

25

light sources. Moreover, a second translation module connects with the light sources and the image capture module, and the second translation driven by the power module. A control module connects to the power module and the image capture module, and a loading platform module has a platform and therein all the modules and the light sources are placed.

The embodiments of the present invention are described in detail hereinafter with reference to the accompanying drawings.

In the present invention, a scanning apparatus comprises a control module 10, light sources 11, a power module 12, an image capture module 13, a loading platform module 14, a first translation module 15, and a second translation module 16, as shown in FIG. 2. The control module 10 comprises a host unit for data processing, and a plurality of control circuits for scanning process. The light sources 11 have at least two light sources with different wavelengths. In the present invention, one light source is a visible light source and the other is an infrared light source. The loading platform module 14 comprises a housing wherein all modules are placed.

Next, the image capture module 13 has at least a lens and a sensors array wherein sensors can be charge-coupled devices. The lens is for converging light from any object onto the sensors array. The sensors array is for transforming the light into corresponding image electric signals. The power module 12 comprises power supplies, motors, gears and belts for supporting energies to any scanning process.



Next, the first translation module 15 comprises a plurality of feeding devices, such as feeding rods and feeding screws. The first translation module 15 can be driven by the power module 12 and changing locations of the lens or the sensors array. In the present invention, the first translation module 15 can adjust the locations of the lens or the sensors array to compensating some optical defeats such as aberration that results from switching different light sources. Moreover, the second translation module 16 also comprises a plurality of feeding devices and feeds the light sources 11 and the image capture module 13 in any scanning motion.

Following, one preferred embodiment is described in FIG. 3A and FIG. 3B. The other one is described in FIG. 4A and FIG. 4B.

FIG. 3A is a schematic diagram showing the correlative locations for the devices in some modules. Dash line 30 represents running light of a pathway for any scanning motion. A visible light source 31 is used for the first-time scanning motion of an object (not shown). A first lens 33 and a second lens 34, both on a feeding screw 36 driven by a motor 38, are lens of the image capture 13 with different optical properties, such as focus and magnification. The second lens 34 is used when the visible light source 31 is as light source for scanning. A sensors array 35 of the image capture module 13, fed by a feeding screw 37 driven by a motor 39, is at a first suitable location for using the visible light source 31 such that a first image length for the first-time scanning motion is made.

As shown in FIG. 3B, when an infrared light source 32 is used for the second-time scanning motion of the object (not shown), the first lens 33 is fed to a second suitable location such that a first object length for the second-time scanning motion is made. Moreover, the sensors array 35 is also fed to a third location that is different from the location 40 of the sensors array 35 for the first-time scanning motion, so that a second image length for the second-time scanning motion is made.

The other one preferred embodiment is shown as FIG. 4A and FIG. 4B. FIG. 4A is a schematic diagram showing correlative locations for the devices in some modules. Dash line 41 represents a running light pathway for a scanning motion. A visible light source 41 is used for the first-time scanning motion of an object (not shown). A lens 43, on a feeding screw 46 driven by a motor 48, is fed a fourth suitable location for using the visible light source 41 as light source. A sensors array 45 of the image capture module 13, fed by a feeding screw 47 driven by a motor 49, is at a fifth suitable location for the visible light source 41 as light source.

As shown in FIG. 4B, when an infrared light source 42 is used for the second-time scanning motion of an object (not shown), the lens 43 is fed to a sixth suitable location that is different from the first location 44. Moreover, the sensors array 45 is also fed to a seventh location different from the second location 51 of the sensors array 45 for the first-time scanning motion.

Accordingly, with adjusting the distance between the object and the lens or the sensors array, some optical defeats resulting from using different light sources can be compensated for getting better scanning images.

5

While the present invention has been described herein in terms of preferred embodiments, numerous modifications and variations will occur to a person the spirit and scope of the present invention. It is intended that the appended claims encompass those modifications and variations.

10

## CLAIMS

What is claim is:

1. Apparatus for scanning an object comprising:

5 an image capture module having at least a lens and a sensors array for capturing light after scanning said object;

a plurality of light sources with different wavelengths for projecting said object through said image capture module;

10 a first translation module connected with said lens and said sensors array of said image capture module, and said first translation module for changing a first location of said lens and a second location of said sensors array according to using different said light sources; and

15 a power module connected with said first translation module and said light sources for supporting energy to said first translation module and said light sources.

2. The apparatus of claim 1, wherein said light sources comprise a visible light source and an infrared light source.

20 3. The apparatus of claim 1, wherein said first location is in a light pathway between said object and said lens.

4. The apparatus of claim 1, wherein said second location is in the light pathway between said lens and said sensors array.

25 5. The apparatus of claim 1, wherein said first translation module comprises a plurality of feeding screws and feeding rods.

6. The apparatus of claim 1, wherein said power module comprises a plurality of power supplies, motors, gears, and belts.

5           7. The apparatus of claim 1 further comprising:  
a second translation module connected with said light sources and said image capture module, and said second translation driven by said power module;

10           a control module connected with said power module and said image capture module; and

a loading platform module having a platform and therein all said modules and said light sources placed.

15           8. The apparatus of claim 7, wherein said control module comprises a plurality of host units for data processing and circuits for executing scanning process.

9. A scanner comprising:

20           an image capture module having at least a lens and a sensors array for capturing light after scanning an object;

a plurality of light sources comprising visible light source and an infrared light source;

25           a first translation module connected with said lens and said sensors array of said image capture module, and said first translation module for changing a first location of said lens and a second location of said sensors array according to using different said light sources;

a power module connected with said first translation module and

said light sources for supporting energy to said first translation module and said light sources;

a second translation module connected with said light sources and said image capture module, and said second translation driven by said power module;

a control module connected to said power module and said image capture module; and

a loading platform module having a platform and therein all said modules and said light sources placed.

10. The scanner of claim 9, wherein the distance between said first location and said object is an object length in a light pathway.

11. The scanner of claim 9, wherein the distance between said second location and said lens is an image length in said light pathway.

12. The scanner of claim 9, wherein said first translation module comprises a plurality of feeding screws and feeding rods.

13. The scanner of claim 9, wherein said power module comprises a plurality of power supplies, motors, gears, and belts.

14. A method of scanning by a scanner comprising:  
using a plurality of light sources with different wavelengths;  
changing a first location of a lens according to said light source;  
and  
changing a second location of a sensors array according to said

light source.

15. The method according to claim 14, wherein said light sources are a visible light source and an infrared light source.

5

16. The method according to claim 14, wherein the distance between said first location and said object is an object length in an imaging system and is changed by a plurality of first translation devices.

10

17. The method according to claim 14, wherein the distance between said second location and said lens is an image length in said imaging system and is changed by a plurality of second translation devices.

**APPARATUS COMPENSATING A SCANNED OBJECT FOR  
OPTICAL CHARACTERISTICS ACCORDING TO LIGHT  
SOURCES OF DIFFERENT WAVELENGTHS**

5

**ABSTRACT OF THE INVENTION**

10 The present invention is about an apparatus for scanning an object. The apparatus comprises an image capture module having a lens and a sensors array for capturing light after scanning the object. There are light sources comprising a visible light source and an infrared light source. Next, a key module of the present invention is a first translation module connected with the lens and the sensors array. The first translation module is used for changing a first location of the lens and a second location of the sensors array according to using different the light sources so as to improve some optical characteristics, such as aberration resulting from different wavelengths of light sources. A power module connects with the first translation module and the light sources for supporting energy to the first translation module and the light sources. Moreover, a second translation module connects with the light sources and the image capture module, and the second translation driven by the power module. A control module connects to the power module and the image capture module, and a loading platform module has a platform and therein all the modules and the light sources are placed.

15

20

25



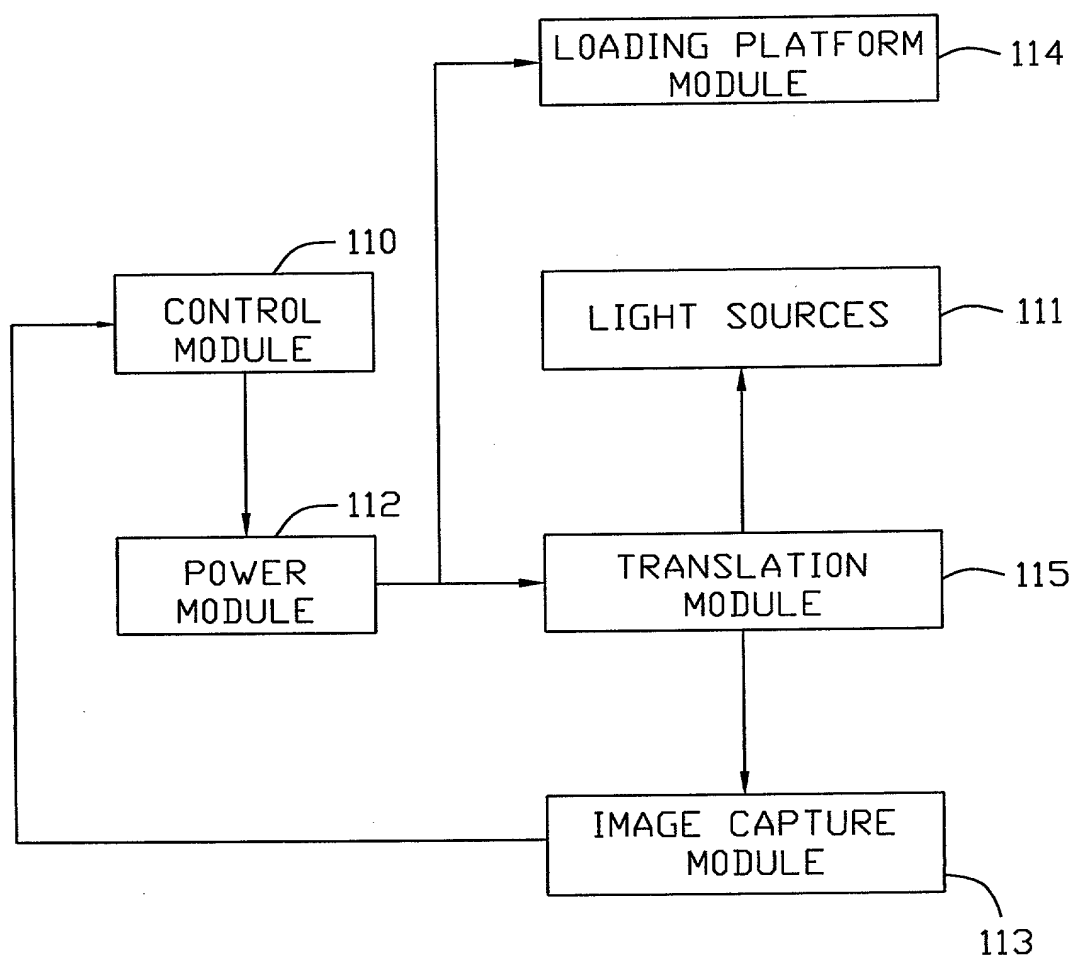
[illegible]

FIG.1(PRIOR ART)

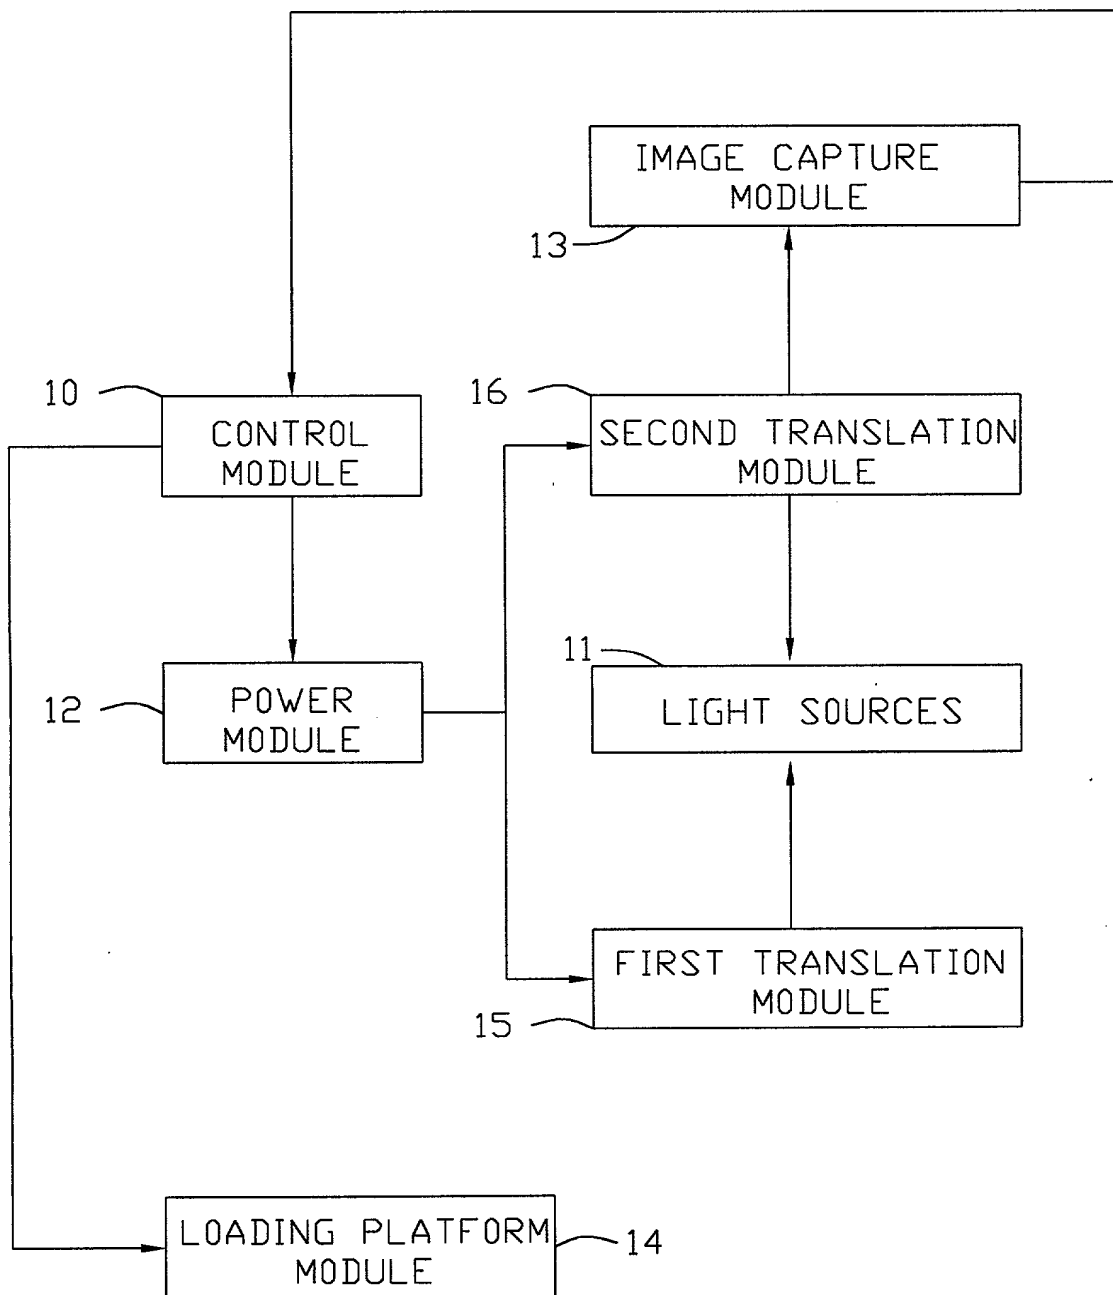


FIG.2

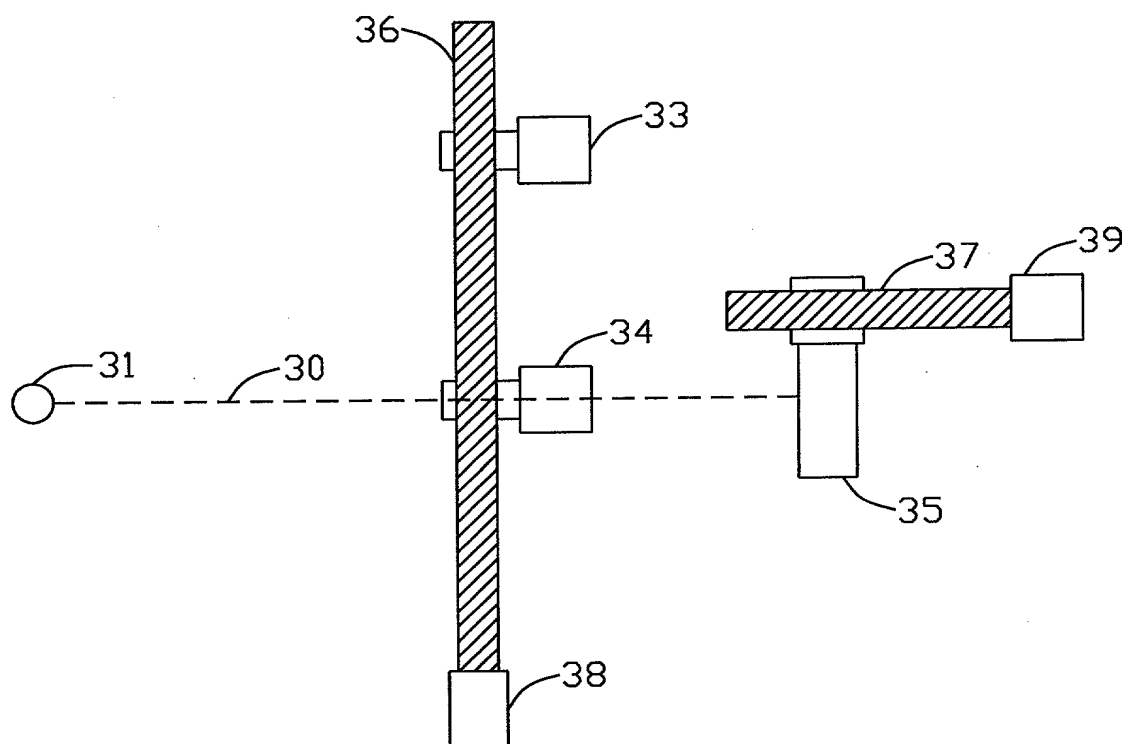


FIG.3A

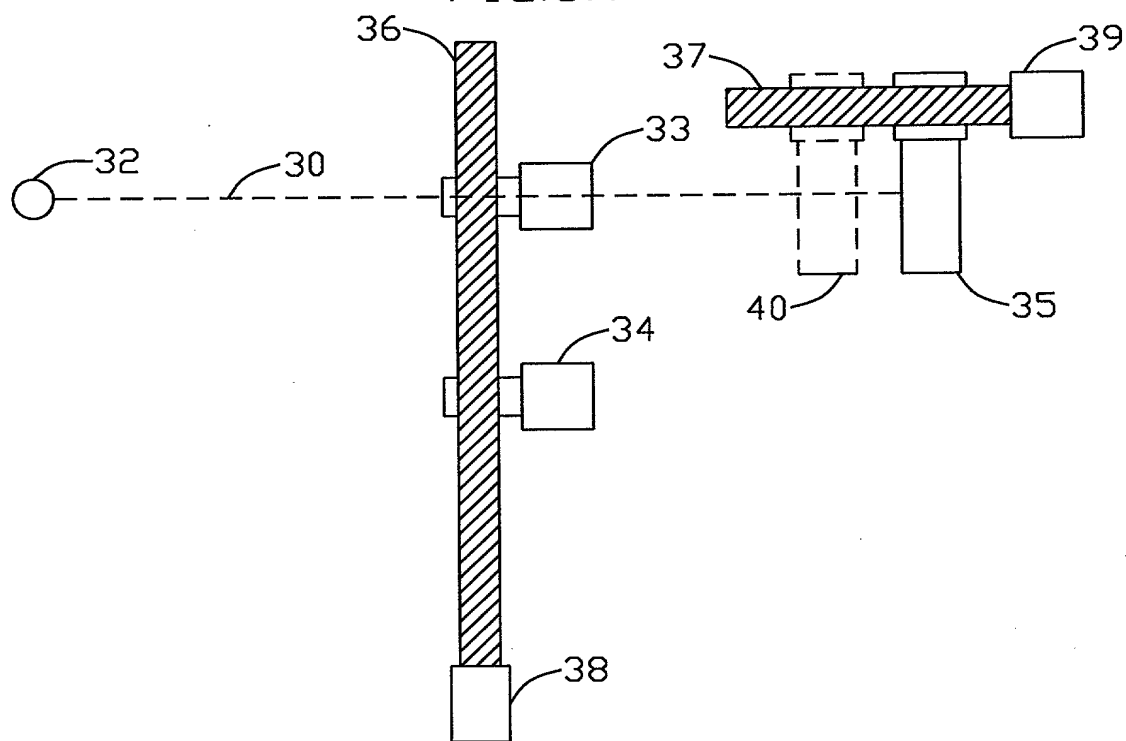


FIG. 3B

FIG.4B

Docket No.: 8.7 5

## **DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought on the invention entitled \_\_\_\_\_

### **APPARATUS COMPENSATING A SCANNED OBJECT FOR OPTICAL CHARACTERISTICS ACCORDING TO LIGHT SOURCES OF DIFFERENT WAVELENGTHS**

The specification of which

[ x ] is attached hereto [ ] was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent of inventor's certificate, or Section 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

#### **Prior Foreign Application(s):**

#### **Priority Claimed**

<u>Number</u>	<u>Country</u>	<u>Day/Month/Year filed</u>	<u>Yes</u>	<u>No</u>
---------------	----------------	-----------------------------	------------	-----------

I hereby claim the benefit under 35 USC § 119(e) of any United States provisional application(s) listed below.

#### **Prior Provisional Application(s):**

<u>Application Number</u>	<u>Filing Date</u>
---------------------------	--------------------

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

#### **Prior U.S. Application(s):**

<u>Serial No.</u>	<u>Filing Date</u>	<u>Status: Patented, Pending, Abandoned</u>
-------------------	--------------------	---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true: and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 or Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Allan M. Lowe, Reg. No. 19,641; Benjamin J. Hauptman, Reg. No. 29310; Israel Gopstein, Reg. No. 27,333; Kenneth M. Berner, Reg. No. 37093 and Michael G. Gilman, Reg. No. 19,114 all of

LOWE HAUPTMAN GOPSTEIN GILMAN & BERNER, LLP  
2034 Eisenhower Avenue, Suite 200  
Alexandra, Virginia 22314

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

\*\*\*\*\*  
**Full name of sole or first inventor:** (1) Wen-Yuan CHANG

Inventor's signature: Wen-Yuan CHANG

Date: SEP - 7 2000

Residence: 430, HSI-TA RD., HSIN-CHU CITY, TAIWAN R.O.C.

Citizenship: TAIWAN R.O.C.

Post Office Address: SAME AS ABOVE

\*\*\*\*\*  
**Full name of second joint inventor, if any:** \_\_\_\_\_

Inventor's signature: \_\_\_\_\_

Date: \_\_\_\_\_

Residence: \_\_\_\_\_

Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

\*\*\*\*\*  
**Full name of third joint inventor, if any:** \_\_\_\_\_

Inventor's signature: \_\_\_\_\_

Date: \_\_\_\_\_

Residence: \_\_\_\_\_

Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_

\*\*\*\*\*  
**Full name of fourth joint inventor, if any:** \_\_\_\_\_

Inventor's signature: \_\_\_\_\_

Date: \_\_\_\_\_

Residence: \_\_\_\_\_

Citizenship: \_\_\_\_\_

Post Office Address: \_\_\_\_\_  
\*\*\*\*\*